

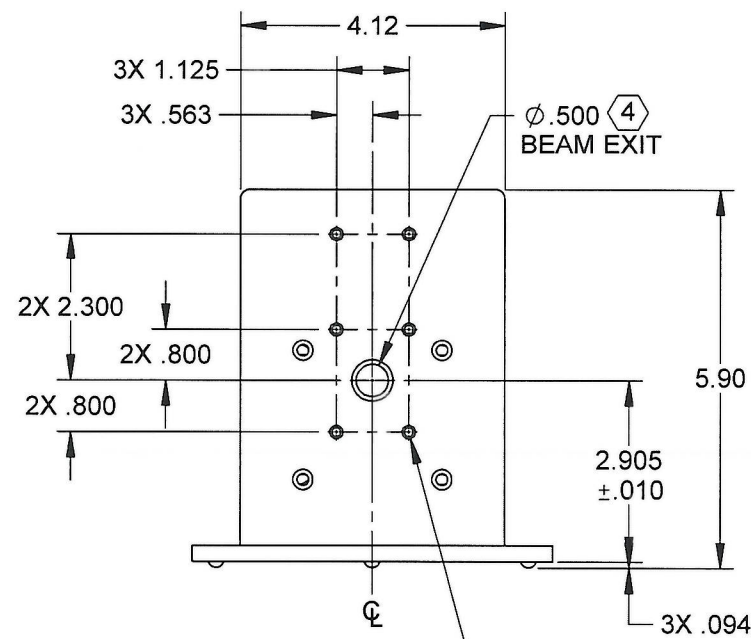
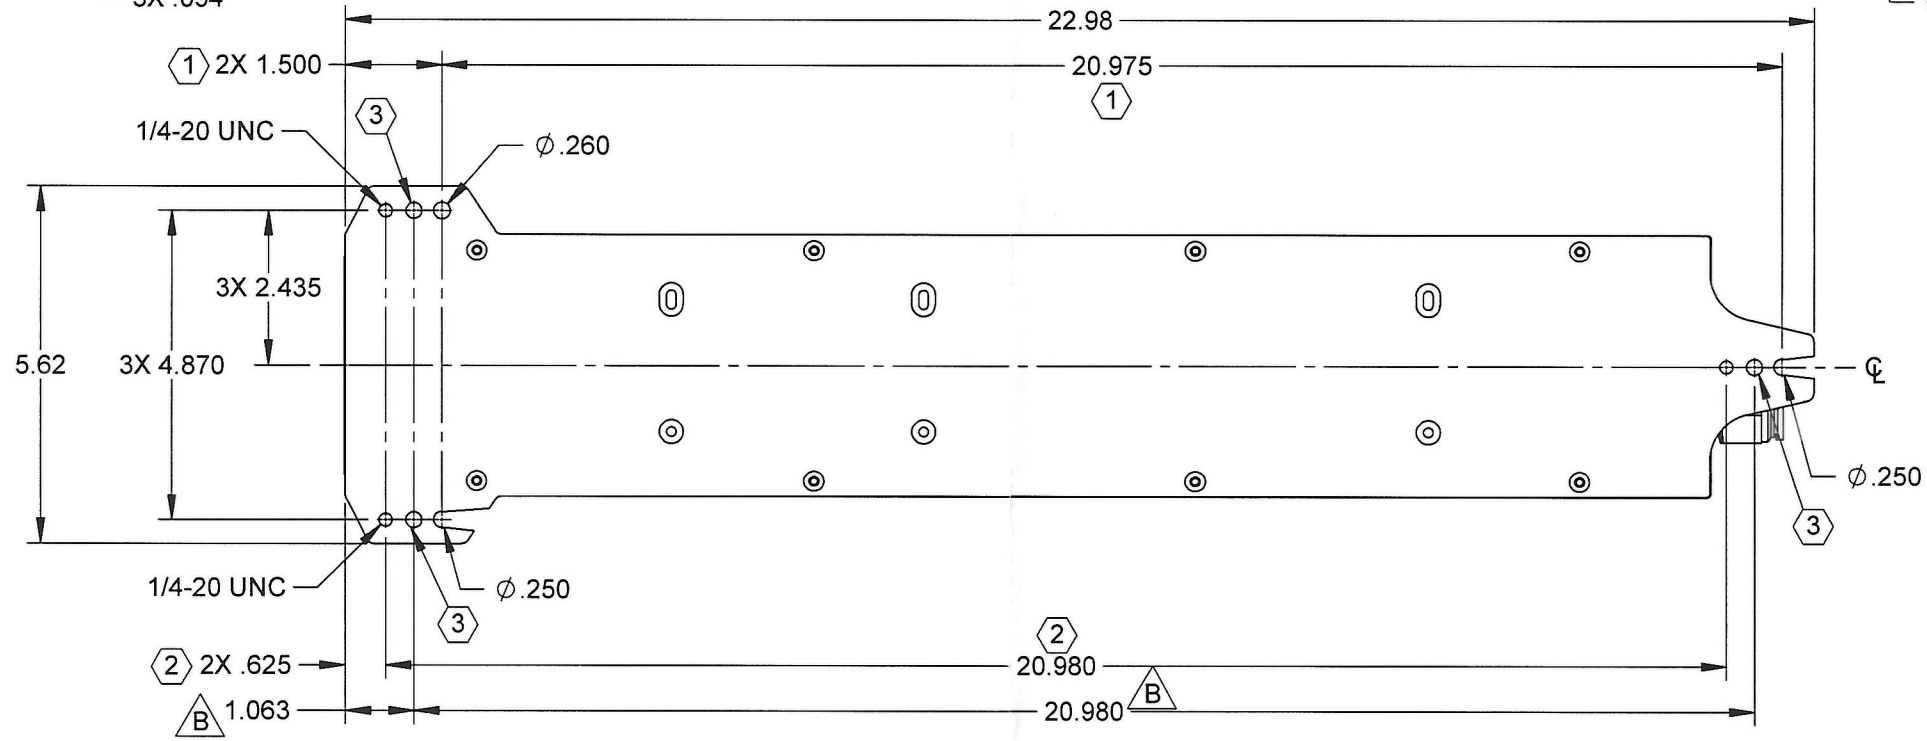


REV	DA	ECN	ECO	DATE	DESCRIPTION	DB
A	.	.	5246	27-Jul-15	RELEASE TO PRODUCTION	DMD
B	.	10849	6037	20-Jun-19	ADD MISSING DIMENSIONS FOR HARDENED BALL MOUNTING POINTS	DMD

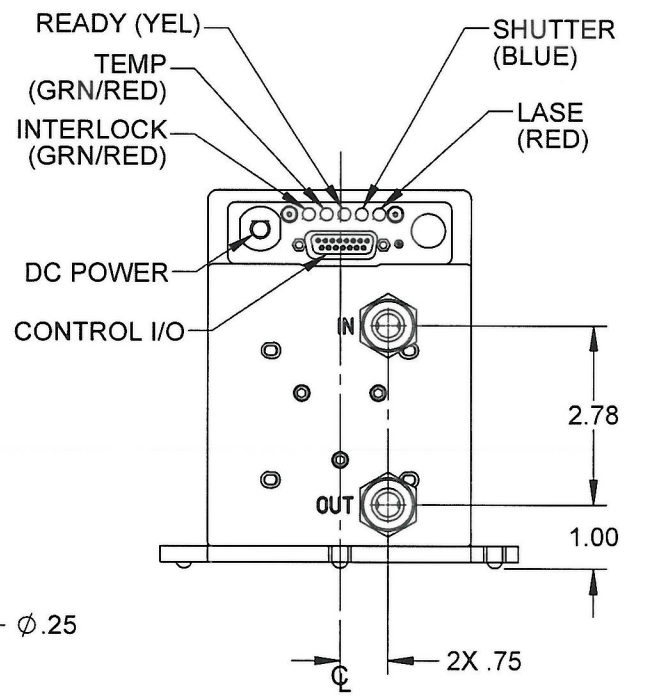

6X 8-32 UNC ACCESSORY MOUNTING HOLES. SCREWS SHOULD NOT EXTEND MORE THAN .19 INTO FACE PLATE

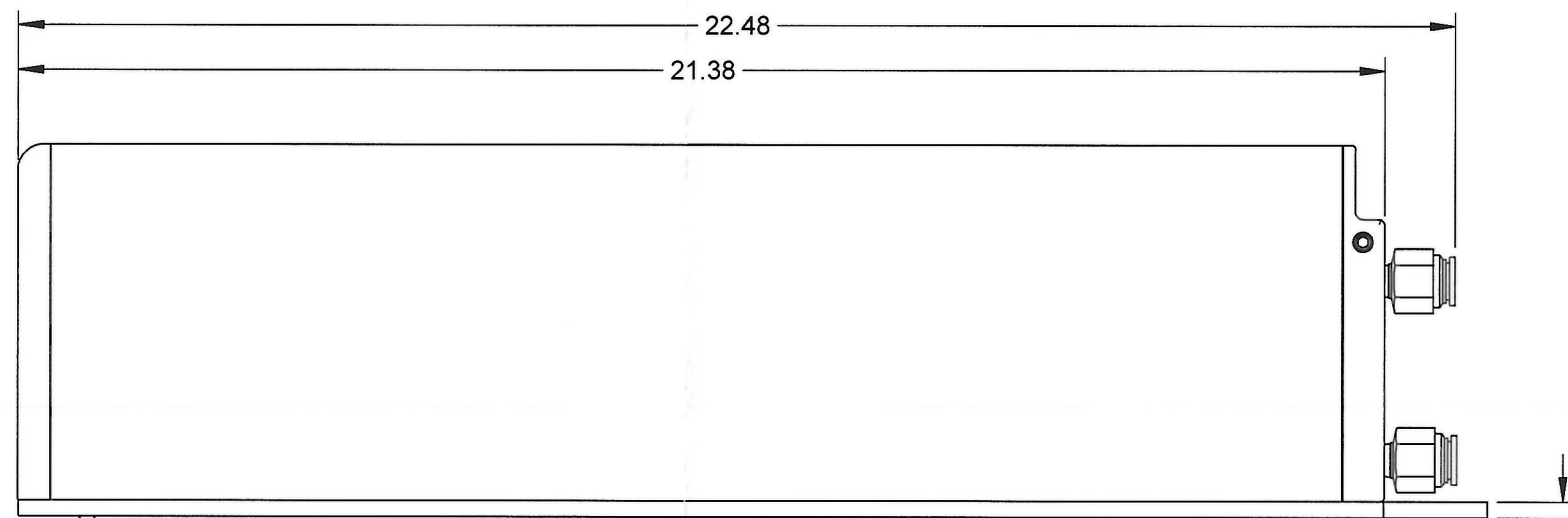

- NOTES:
- ① THIS HOLE PATTERN USED WHEN TOP ACCESS FASTENING DESIRED.
 - ② THIS HOLE PATTERN USED WHEN BOTTOM ACCESS FASTENING DESIRED.
 - ③ HARDENED BALL MOUNTING POINT (Ø.250 STEEL BALL).
 - ④ BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

TOLERANCES UNLESS NOTED:		PROPRIETARY: THIS DRAWING IS PROPRIETARY TO SYNRAD, A NOVANTA COMPANY, AND SHALL NOT BE USED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION FROM SYNRAD AND/OR NOVANTA.	SYNRAD 4600 Campus Place Mukilteo, WA 98275 Phone: (425)349-3500 Fax: (425)349-3667	
.x = ± .1	ANGLE = ± °			
.xx = ± .04				
.xxx = ± .005				
MATERIAL:		THIRD ANGLE PROJECTION		
		DESCRIPTION: OUTLINE & MOUNTING, Ti SERIES, HS		
		DRAWN BY: D. DUVALL	DATE: 27-Jul-15	DWG/FILE NUMBER: 300-19847-06
SURFACE TEXTURE: N/A		QTY CHK BY: <i>K. Kerley</i>	DATE: 6-26-19	PART NUMBER: 300-19847-06
		ENG CHK BY: <i>Talwin</i>	DATE: 6-26-19	ENG: M. LIMA
		APPROVED BY: <i>[Signature]</i>	DATE: 6/26/19	SIZE: B
			UNITS: Inches	CATEGORY: .
			SHEET 1 of 1	FINISH CLASS: .
				REV. B