


Diamond J-5

RF Excited OEM Industrial CO₂ Laser

Coherent Diamond J-5 Series are fully sealed, pulsed CO₂ lasers offering average power greater than 400 Watts in a fully integrated and compact package. The unique pulsing characteristics derived from its slab discharge design enable the J-5 Series laser to reach peak powers well in excess of 1 kW in contrast to CW modulated lasers. The J-5 Series lasers are available at 10.6 μm and 9.4 μm and can be operated with pulse repetition rates up to 200 kHz with fast pulse rise and fall times. This combination of wavelength selection, high peak power and fast rise and fall time times, together with power on demand and excellent beam quality makes the J-Series an ideal laser for a wide range of materials processing applications.

The J-5 Series is part of the J-Series family spanning a power range from 150 W to greater than 500 W. The J-Series family is built on a common platform with common mechanical, electrical, and optical interfaces, common software, and a common service and support strategy. All J-Series lasers offer proactive maintenance capability enabled by the integrated yet field replaceable RF power supply design and overall systems monitoring using Coherent's field proven full suite of on-board diagnostics.

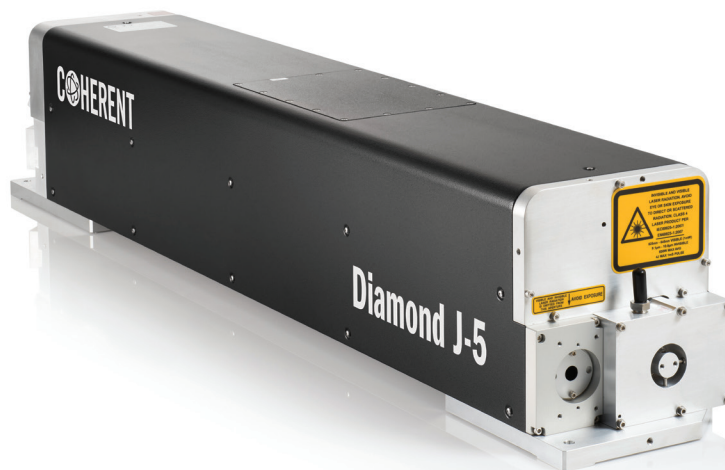

FEATURES

- Wide operating power range
- High peak power
- Pulse frequency from single-shot to 200 kHz
- Fast rise-and-fall time
- Outstanding beam quality
- Excellent power stability
- Low-cost OEM configuration
- Integrated but removable RF power supply
- Compact design
- Equipped with on-board internet-accessible diagnostics

APPLICATIONS

- Converting
- Drilling
- Cutting
- Scribing
- Engraving
- Marking

Specifications ¹	Diamond J-5-9.4	Diamond J-5-10.6	Diamond J-5-10.6NB
Wavelength (μm)	9.36 ±0.05	10.6 ±0.4	10.6 ±0.05
Output Power ^{2,3} (W)	≥400	≥450	≥450
Power Range ⁴ (W)	40 to 400	45 to 450	45 to 450
Typical Peak Power ⁵ (W)	1700	1800	1800
Power Stability ^{2,6} (%)	±6		
Mode Quality (M ²)	<1.2		
Beam Waist Diameter ^{7,8} at 1/e ² (mm)	7.0 ±1.0	8.5 ±1.0	8.5 ±1.0
Full-Angle Beam Divergence ⁸ (mrad)	≤2.2		
Typical Polarization (parallel to baseplate)	Linear ≥100:1		
Beam Ellipticity ^{7,8}	≥0.83, ≤1.2		
Pulse Frequency (kHz)	Single-shot to 200		
RF Excitation Pulse Width Range (μsec)	2 to 1000		
Duty Cycle Limit (%)	≤40		
Fall Time ⁵ (μs)	≤40		
Weight	58 kg (127 lbs.)		
Dimensions (L x W x H)	1225 x 198.1 x 227.6 mm (48.23 x 7.8 x 8.96 in.)		
Electrical Power Requirements			
DC Input Voltage (VDC)	48 ±1%		
Continuous DC Input Current ⁹ (A)	≤190		
Peak Current (A)	≤380 for ≤6 ms		
Coolant			
Heat Load (kW)	≤9		
Dynamic Coolant Flow Rate (l/min.)	≥9.5		
Coolant Setpoint Temperature Range	21 to 25°C (69.8 to 77°F)		
Coolant Temperature Stability (max.)	±1.0C (±0.18°F)		
Coolant ¹⁰	Anti-Corrosion Treated Water		
Coolant Differential Pressure ¹¹ (kPa)	241 (35 psi) at 9.5 l/min. (2.5 gpm)		
Coolant Maximum Static Pressure (kPa)	827 (120 psi)		
Environmental Conditions			
Ambient Temperature	5°C to 45°C (41 to 113°F)		
Relative Humidity ¹² (non-condensing) (%)	≤95		
Altitude	≤2000 m (6500 ft.)		

Notes:

- All specifications apply when the product is operated in accordance with the guidelines defined in the operators manual.
- Measured at 10 kHz PRF, max. duty cycle after a 30 second warm-up from cold start.
- Guaranteed during warranty period.
- Output stability specification may not be met at lowest power or at acoustic resonances.
- Measured for a 100 μs pulse width at 1 kHz repetition frequency .
- Measured as ±(Pmax-Pmin)/2Pmax.
- Measured at typical waist location ~1.4 m from the laser output.
- Measured at 10 kHz PRF, 18% duty cycle.
- At 10 kHz PRF, maximum duty cycle operation.
- See manual for details.
- This differential pressure is from system input to output and do es not include the pressure drop from chiller fittings and the s apply and return hose.
- Do not operate at or below dew point.

Mechanical Specifications

Diamond J-5

